


VIEW A-A

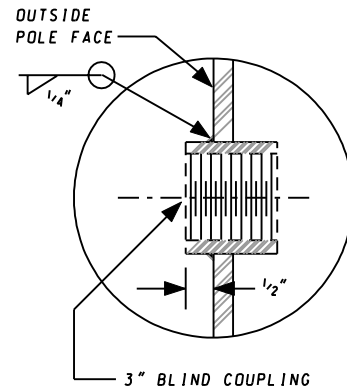


DETAIL I

POLE SIZE (WALL THICKNESS x O.D. AT BASE OF PLATE x O.D. AT POLE TOP x POLE HEIGHT)	ARM SIZE (FLANGE PLATE SHALL ACCEPT ANY MAST ARM LISTED WITH THE FOLLOWING INCLUSIVE LENGTHS) (SEE NOTE 2)	ANCHOR BOLTS (ALL BOLTS SHALL HAVE A CLASS OF FIT RATING OF 2A/2B UNC)	BASE PLATE (SIDE x SIDE x PLATE THICKNESS)	BOLT CIRCLE (DIA.)
0 GAUGE - 15" x 11.22" x 27'-0"	50' FLANGE: 50' 60' - 70' FLANGE: 60' - 70'	FOUR (4) 2" DIA. x 72" LENGTH 4 1/2 THREADS PER IN.	23" x 23" x 2"	22"

NOTES:

1. ALL ANCHOR BOLT HOLE DIAMETERS SHALL BE $\frac{3}{8}$ " LARGER THAN THE ANCHOR BOLT DIAMETER LISTED.
2. REFER TO APPROPRIATE 800 SERIES STANDARD PLATE FOR FLANGE PLATE AND ACCESS HOLE DETAILS.
3. REFER TO APPROPRIATE 800 SERIES STANDARD PLATE FOR BOLT CIRCLE AND ANCHOR BOLT PLACEMENT.

SPECIFICATION 818	CATEGORY CODE ITEMS										
APPROVED 	DIRECTOR - OFFICE OF TRAFFIC AND SAFETY										
SHA State Highway Administration	<table> <tr> <td>APPROVAL • SHA REVISIONS</td><td>APPROVAL • FEDERAL HIGHWAY ADMINISTRATION</td></tr> <tr> <td>APPROVAL 7-1-94</td><td>APPROVAL 7-1-94</td></tr> <tr> <td>REVISED 10-1-01</td><td>REVISED 2-1-01</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> </table>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 7-1-94	APPROVAL 7-1-94	REVISED 10-1-01	REVISED 2-1-01	REVISED	REVISED	REVISED	REVISED
APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION										
APPROVAL 7-1-94	APPROVAL 7-1-94										
REVISED 10-1-01	REVISED 2-1-01										
REVISED	REVISED										
REVISED	REVISED										

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
**STANDARD TWIN MAST ARM POLE WITH
 DIFFERENT FLANGE PLATES**

STANDARD NO.

MD 818.08